


RUTGERSON



Rutgerson Master Flush Hatch Mounting Instruction manual - English

1. Demount plastic film from deck sealing.
2. Open hatch lid and lock the lid in the most open position (to be able to mount the deck screws).
3. Place the hatch in the cut-out hole in deck.
4. Use deck screws with flat surface against the frame (not countersunk) to tighten the frame against deck. Don't forget to tighten deck screws through hinges and that these need to be sealed with sealing compound, since they are positioned outside the silicone sealing. Note that the sealing function between deck and frame is a customer responsibility, so it is very important that the screws are tightened accurately.

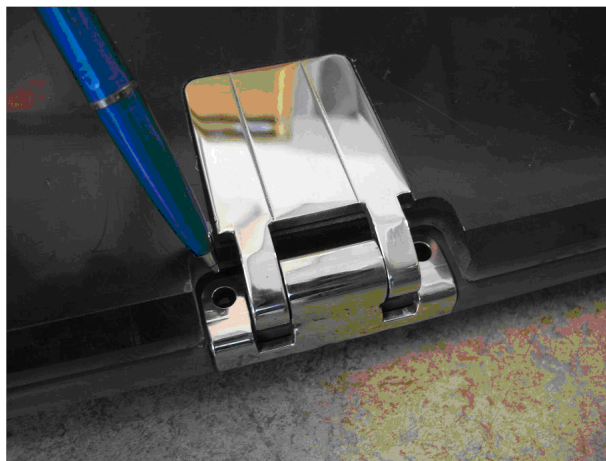

It is very important that deck screws through hinges also are tightened accurately.